




## QINEO WDB-20

### **Additional wire drive unit for a safe wire feed over long distances**

The additional wire drive unit feeds the wire over a maximum distance of approx. 30 meters from a wire drum to the main wire drive. The feeding of the additional wire drive unit depends on the feeding speed of the main wire drive unit. The transport takes place with little wear and almost no friction through a wire spiral with a large diameter.

- Wire feed over long distances enables the wire drum to be positioned in an easily accessible place
- Safe wire feed over a distance of up to 30 meters between wire drum and main wire drive unit

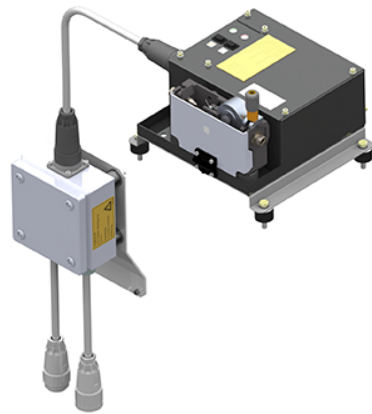



## QINEO WDB-20

### Technical Data

Wire feed speed	max. 30 m/min
Dimensions L/W/H	300/260/180 mm
Weight	6,2 kg
Wire diameter	0.8 - 2.0 mm

### Application

Auto


### Process

- MIG/MAG Tandem
- MIG/MAG Single Wire AC
- MIG/MAG Single Wire pulse
- MIG Bracing
- MIG/MAG Single Wire

### Questions about the product?

Your contact partner:  
Daniel Weber  
Tel.: +49 (0)2773 85-430  
gt-sales@cloos.de

image not found or type



Technical modifications reserved  
Version: 02.05.2024

**CLOOS**